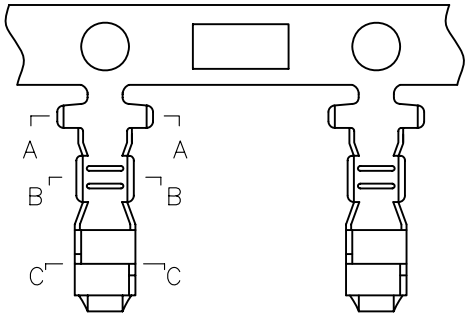

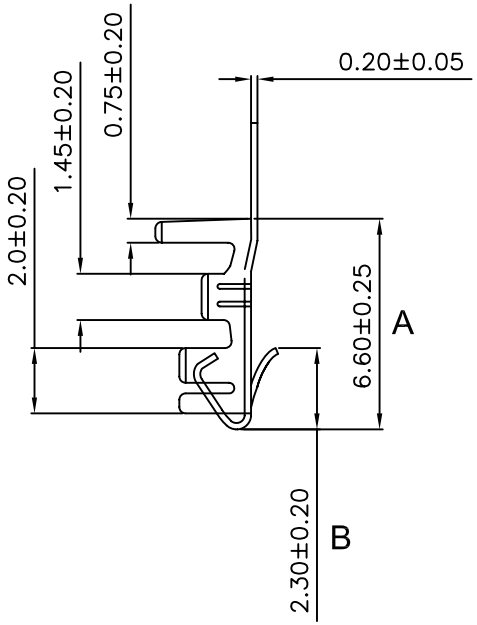

SPECIFICATIONS

- Voltage Rating: 250V AC/DC
- Current Rating: 3A AC/DC
- Withstanding Voltage: 1,000V AC/minute
- Insulation Resistance: 1,000MΩmin
- Temperature Range: -25° C to +85° C
- Contact Resistance: 20mΩmax

TERMINAL

- Part NO: SCT2501T
- Thickness: 0.20mm
- Wire Range: AWG#22-#28
- Material: Phos. Bronze
- Hardness: H
- Reel Q'ty: 8000pcs

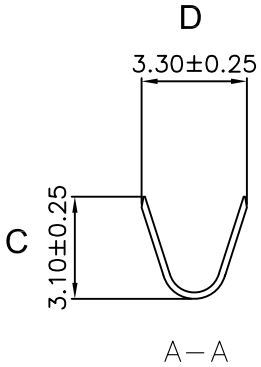



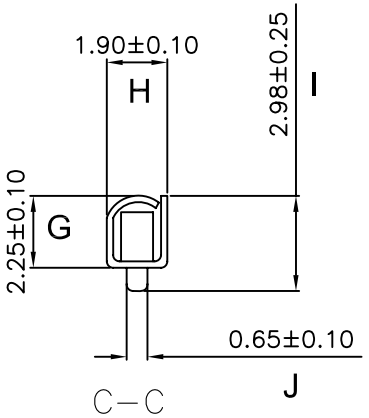

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW	———	———

OPERATION	
~ 10	±0.15
20 ~ 30	±0.30
30 ~	±0.50
Angle	± 2°
DIM	TOL

DRAW	CHENA	05/12/27
DESIGN		
CHECK	MICKY	05/12/28
APPROVE	HELLEN	05/12/28

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED

PART NO.	SCT2501T
TITLE:	XH2.5 TERMINAL
DRAWING NO.	SCT2501