
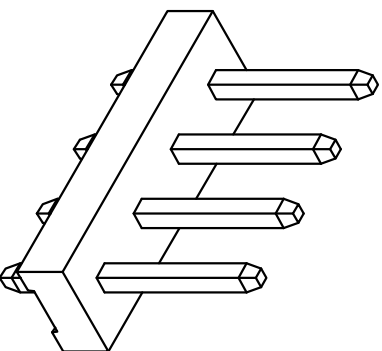
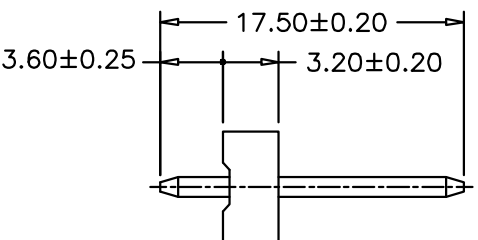


P.C.B LAYOUT

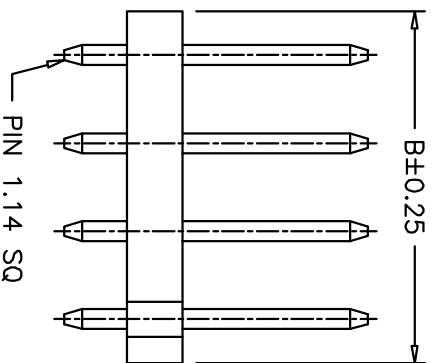

**SPECIFICATIONS**  
 Voltage Rating: 250V AC/DC  
 Current Rating: 7A AC/DC  
 Withstanding Voltage: 1500V AC/minute  
 Insulation Resistance: 1000MΩ min.  
 Temperature Range: -25° C - +85° C  
 Contact Resistance: 20mΩ max

WARFR  
 Part No: SCT5080WVA-XXP  
 Poles: 2-20  
 Material: Nylon 66, UL94V-2  
 Pin: Brass, Tin plated

PART NO.	Dimensions	
	A	B
SCT5080WVA-02P	5.08	10.16
SCT5080WVA-03P	10.16	15.24
SCT5080WVA-04P	15.24	20.32
SCT5080WVA-05P	20.32	25.40
SCT5080WVA-06P	25.40	30.48
SCT5080WVA-07P	30.48	35.56
SCT5080WVA-08P	35.56	40.64
SCT5080WVA-09P	40.64	45.72
SCT5080WVA-10P	45.72	50.80
SCT5080WVA-11P	50.80	55.88
SCT5080WVA-12P	55.88	60.96
SCT5080WVA-13P	60.96	66.04
SCT5080WVA-14P	66.04	71.12
SCT5080WVA-15P	71.12	76.20
SCT5080WVA-16P	76.20	81.28
SCT5080WVA-17P	81.28	86.36
SCT5080WVA-18P	86.36	91.44
SCT5080WVA-19P	91.44	96.52
SCT5080WVA-20P	96.52	101.60

REV	DATE	MODIFICATION DESCRIPTION	CHANGE APPROVE	OPERATION	DRAW	JUDY	SCALE	PART NO.	TITLE:	DRAWING NO.
0	05/12/27	NEW		~ 10 ± 0.15	DESIGN		mm	SCT5080WVA-XXP	MX5.08 180C WAFER	SCT5080
1				20 ~ 30 ± 0.30	CHECK	MICKY	A4			
				30 ~ Angle DIM	APPROVE	HELLEN	SHEET			
				± 2 TOL	APPROVE		PROJ.			

**SCT** 森康达电子有限公司  
 SCONDAR ELECTRONIC LIMITED